

REMOTE MONITOR

AI-416

*Input 24V DC



■ Specifications

Data Input:	Parallel BCD Input DC24V ($0 \leq L \leq 2, 20 \leq H \leq 24$)
Zero Display:	Leading zero suppression (option)
Display:	LED 14.2mm, 6 digits
Decimal Point:	Settable to any digit position
Positive Logic:	Connect terminal (U) and 0V terminal (17)
Negative Logic:	Connect terminal (U) and +24V terminal (18, V)
Power Supply:	DC24V $\pm 10\%$
Operating Temperature:	0~50°C, 35 to 85%RH
Power Consumption:	Approx. 90mA
Dimensions:	24(H) x 96(W) x 97(D)mm DIN Size
Weight:	Approx. 130g


■ Features

- BCD parallel input
- With latch
- Leading zero suppression
- Bright LED, 14.2mm (Red)
- Power supply, DC24V


■ Ordering Code

AI-416

■ Dimensions

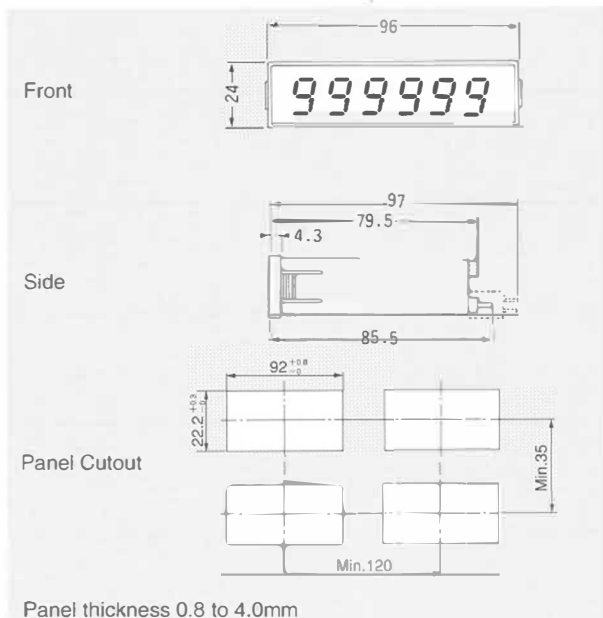

■ Connection Diagram

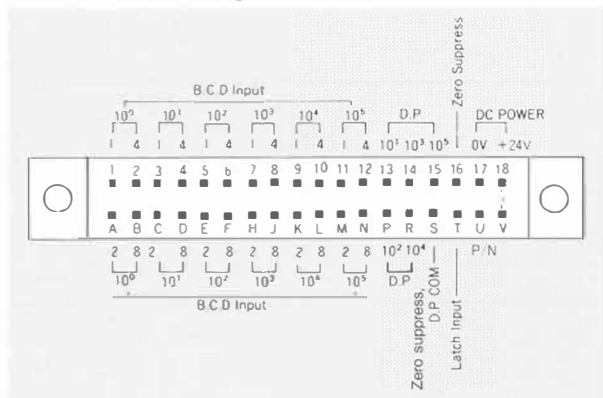

Sales, Service, Technical support

Topac Inc.

231 CJC Hwy STE102, Cohasset MA 02025 USA

www.topac.com, sales@topac.com

Tel: 781 740 8778 Fax: 781 740 8779